


# I·F·P· W·T·-·7·5·0·0

4GB/32GB



**ANDROID 11 OPERATING SYSTEM**

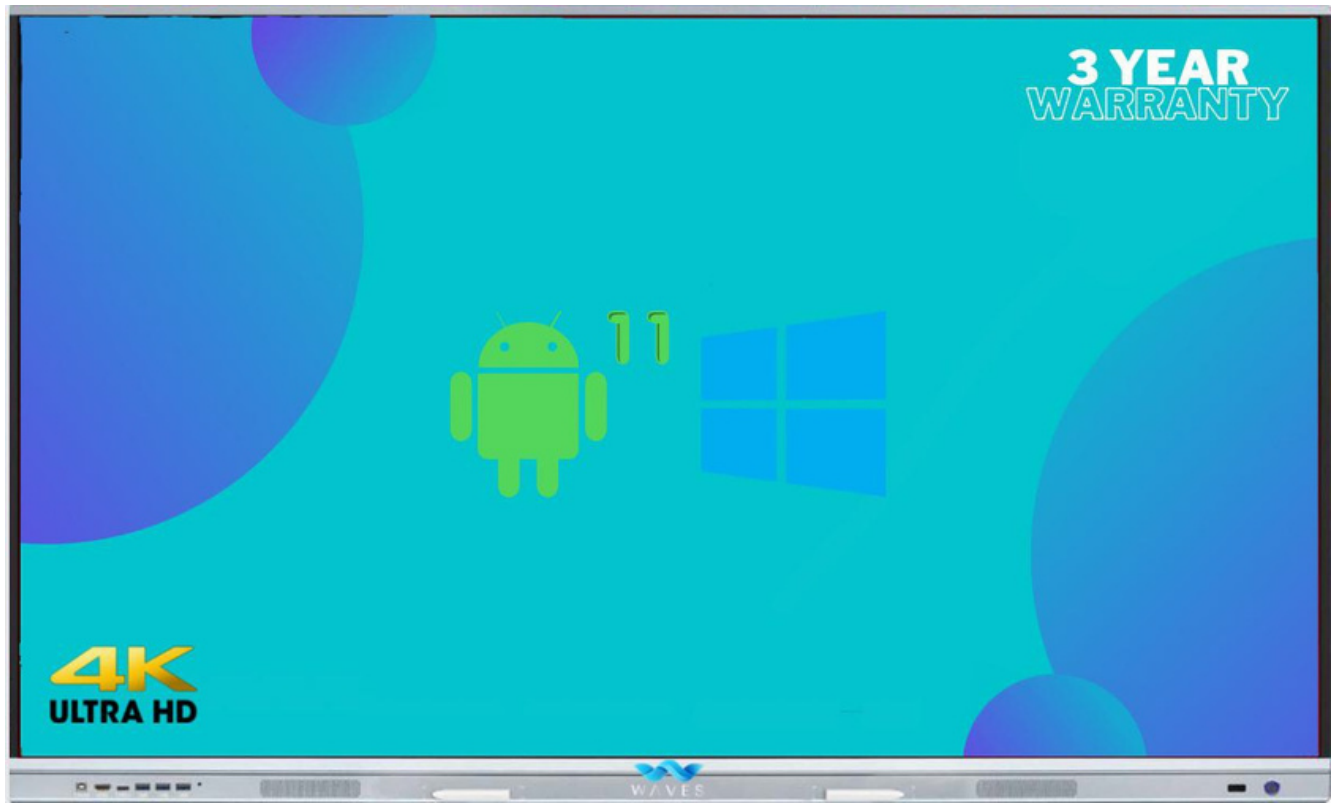

**USB 3.0 X 3 PORTS IN FRONT**



**WIRELESS SCREEN SHARING UPTO 4 DEVICES**



**AVAILABLE UPTO 8GB SYSTEM MEMORY**



**FRONT TYPE C USB PORT**



**4K ULTRA HIGH DEFINATION**



**PRIMARY:- 128GB + SECONDARY:- 1TB**



**NOTE FEATURE**



**20 POINT TOUCH**

<b>Panel</b>	Panel size	75"
	Respond Time	4ms
	Visual Ratio	16:9
	Panel Type	LG IPS Panel
	Max Visual Area	1649.664 (H) x 927.936 (V)mm
	Resolution	3840 (H) x 2160 (v)
	Pixel Pitch	0.4296 x 0.4296mm
	Frequency	60Hz
	Display Color	7.07B (10bit)
	Color Saturability	72%
	Contrast Ratio (Type)	4000:1
	Viewing Angle	178°(H/V)
	Light source	DLED
	Brightness	400cd/m2
	Life Span	≥50000 hrs
<b>Audio-Video Parameters</b>	Speaker	Sound Track:- 2.0 Power :- 2*20W
<b>Touch Parameter</b>	Touch specifications	Non-contact infrared sensing technology
	Support systems	Windows 10/ Windows 8/ Windows 7 / Windows XP / Android / Linux / Mac OS X / Chrome
	Touch Points	20 points touch
	Min.Identifier	2mm
	Input mode	Opaque object (finger,pen,etc)
	Response time	≤10ms
	Touch depth	±1mm
	Writing height	≤3mm
	Writing display	Single stylus pen two-color
	Output co-ordinates	32767(W)*32767(D)
<b>System</b>	System Version	Android 11.0
	CPU	Quad core A55-2.1 GHz
	GPU	Mali G52MP2
	RAM	4GB System Memory
	ROM	32GB System Storage
	<b>Wireless</b>	Bluetooth
Wi-Fi		Version:- 802.11ac/b/g/n/a/ax
Working frequency		2.4GHz/5GHz
Working distance		Upto 10 meters
Remark		Via the wireless module SI07B
<b>Rear I/O Interface</b>	HDMI IN	2
	USB 2.0	1
	USB 3.0	2
	USB TOUCH PORT	1
	AUDIO IN	1
	LINE OUT	1
	OPTICAL OUT	1

	RS232	1	
	LAN RJ45 OUT	1	
	LAN RJ45 IN	1	
Front Interface	USB 3.0	2	
	TOUCH USB	1	
	HDMI I	1	
	TYPE-C	1 (full functional is optional)	
Power	Voltage	100 – 240V ~ 50/60Hz 4A	
	Max power consumption	350W	
	Standby power consumption	≤0.5W	
Structure	Bare dimension	1709*1020*88mm	
	Packing dimension	1860*220*1160mm	
	Machine + wall mount thickness	118mm (WIB9060G)	
	VESA hole site	800*400mm	
	Wall mounting screw specifications	M8*25mm	
	Net weight	58 KG	
	Gross weight	68 KG	
	Environment	Working temperature	0°C~40°C
		Working humidity	10%~90%RH
Storage temperature		-20°C~60°C	
Storage humidity		10%~90%RH	
Working Elevation		<5000m	



